



## 5V DIP 24pin 2.5Gbps Receiver Module with Multi Rate CDR

### ***RXMM958***

---

#### **Features**

- *Multi Rate Clock and Data Recovery*
- *STM-16/Gigabit Ethernet/STM-4/STM-1*
- *PIN Type Optical Receiver*
- *Sensitivity better than -22.5/-31.5dBm*
- *Differential data and clock outputs*
- *Analog Optical Input Level Monitor Output*
- *TTL Loss of Optical Power Alarm*
- *+5V Single Power Supply*
- *24 pin DIP Metal Package*

#### **Application**

- *SDH / DWDM Transmission System RXOTU*
- *High-Speed Data Communications*

## Standards

- 2.5G MSA
- ITU-T G.825 & G957

## Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	°C	-20	85
Relative Humidity	RH	%	-	85
Power Supply Voltage	Vcc		0	+6.0
Lead solder temperature	-	°C	-	260
Lead solder duration	-	S	-	10
Fiber yield strength	-	Kgf	-	1
Fiber bend radius	-	Mm	10	-

## Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Case Operating Temperature Range	Tc	°C	0	-	70
Power Supply Voltage	Vcc	-	0	-	+6.0
Relative Humidity	RH	%	-	-	85

## Specifications (tested under recommended operating conditions , unless otherwise otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Test condition	
Electrical Characteristics							
Operating Voltage	Vop	V	+4.75	+5	+5.25		
Supply current	Icc	mA	-	270	350		
CML Output	Data	-	mV	700	800	1000	Differential Output Voltage Swing
	Clock	-	mV	600	700	1000	
	Impedance	-	Ω	-	100	-	Internal AC Coupled load impedance 50Ω
	Data-Clock difference	phase	ps	-75	-	+75	
Los	TTL (Active High)						
Rate Select	LVTTTL(Active High)						
Optical receive Characteristics							
Receiver Wavelength	-	nm	1200	-	1600		
Receiver Sensitivity	2.488G	S	dBm	-	-22.5	-22	BER=1×10 <sup>-12</sup>
	1.250G			-	-24	-	PRBS=223-1

	622M		-	-24	-
	155M		-	-23	-
Overload	input optical Power	-	dBm	-3	-
LOS(TTL)		-	dBm	-	-27 -26
Jitter Performance					
Jitter Generation	2.488G	Ulp-p		0.104	5K-20MHZ
				0.056	1M-20MHZ
	622M			0.056	1K-5MHZ
				0.019	250K-5MHZ
	155M			0.049	500HZ-1.3MHZ
				0.028	65KHZ-1.3MHZ
Jitter Transfer Function			Compliant with ITU-T G..825		
Jitter Tolerance					


## Pin Description

Pin	Name	Description	Pin	Name	Description
1	SEL1	Rate Select	24	NC	No Connection
2	SEL2	Rate Select	23	OIL	Optical Power Monitor
3	LOS	LOS	22	VCC	Positive Power Supply
4	GND	Ground	21	NC	No Connection
5	CKO	Negative Clock Output	20	GND	Ground
6	CKO	Positive Clock Output	19	GND	Ground
7	GND	Ground	18	NC	No Connection
8	VCC	Positive Power Supply	17	GND	Ground
9	GND	Ground	16	GND	Ground
10	DO	Positive Data Output	15	GND	Ground
11	DO	Negative Data Output	14	GND	Ground
12	GND	Ground	13	NC	No Connection


## Data Rate Select *(LVTTTL:Active High)*

SEL1	SEL2	Operating Rate
0	0	2.488Gb/s
1	0	1.250Gb/s
0	1	622Mb/s
1	1	155Mb/s

## Block Diagram

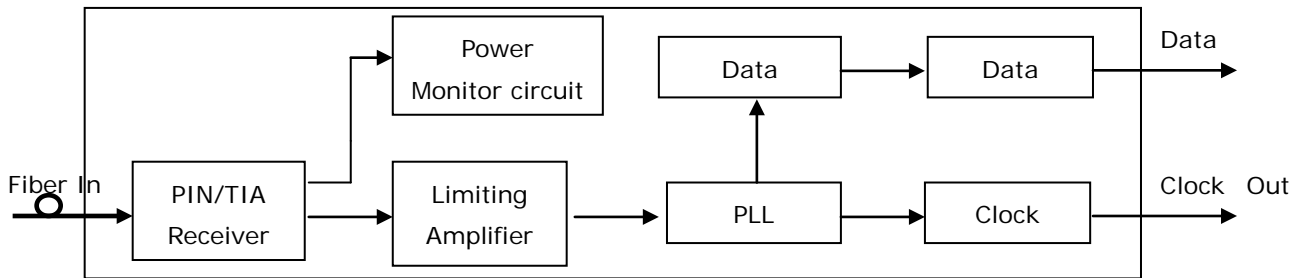

## Package Outline

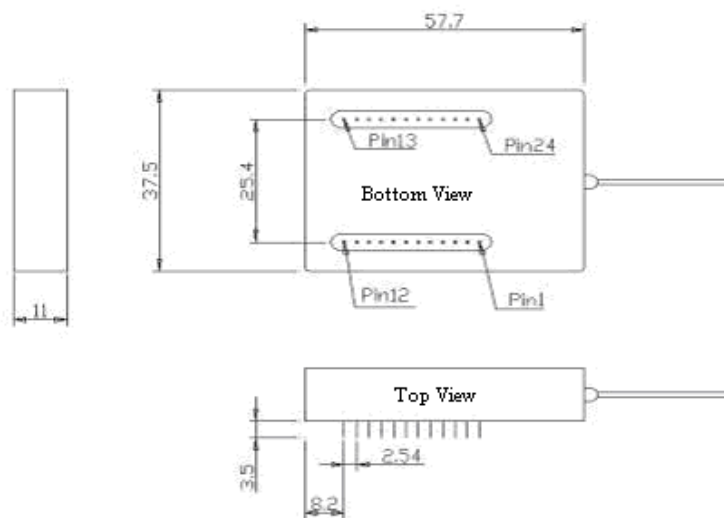

## Ordering Information

Part No	Specification					Application	Others
	Package	Datarate	Detector	Sensitivity	Temp Reach		
RTXM958	24pin DIP	2.5G multi-rate	PIN	-22dBm (max)	0~70°C	- SDH/SONET	Data is sampled on the rising edge of CLOCK
RTXM958-N	24pin DIP	2.5G multi-rate	PIN	-22dBm (max)	0~70°C	- SDH/SONET	Data is sampled on the falling edge of CLOCK

WTD reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Edition 2009-12-1

Published by Wuhan Telecommunication Devices Co.,Ltd.

Copyright © WTD

All Rights Reserved.