



# 5V DIP24pin 2.5Gbps Transmitter Module

## **TX5S335**

---

### Features

- 1550nm DFB-LD , built-in isolator
- Single-ended and differential output selectable
- Very low dispersion penalty up to 80km
- With all system alarming function
- DIP24pin package
- Pin function compatible with multi-source standard

### Application

- Applied to STM-16/OC-48 fiber transmission system

### Standards

- G.957&2.5G MSA

## Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	°C	-20	+85
Relative Humidity	RH	%	-	80
Power Supply Voltage	Vcc	V	-	6
Lead Solder Temperature	-	°C	-	260
Lead Solder Duration	-	S	-	10
Fiber Yield Strength	-	kgf	-	1
Fiber Bend Radius	-	mm	10	-

## Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Ambient Operating Temperature Range	Tc	°C	0	25	+60
Power Supply Voltage	VCC	V	+4.75	+5.0	+5.25

## Specifications

*(tested under recommended operating conditions ,unless otherwise noted)*

Parameter	Symbol	Unit	Min	Typ	Max	Test condition
Electrical Characteristics						
Supply Current	Icc	mA	150	-	300	
Single Ended Data Input Swing	-	mV	400	500	1000	
Single Ended Clock Input Swing	-	mV	400	500	1000	
Signal Level(TTL)	-	V				Active Low
Optical transmitter Characteristics						
Data Rate	-	Gbps	-	2.488	-	
Launch Optical Power	Po	dBm	-2	-	+3	CW
Center Wavelength Range	$\lambda_c$	nm	1530	1550	1560	
Extinction Ratio	EX	dB	8.2	9.5	-	
Spectral Width	$\Delta\lambda$	nm	-	-	1	
Side Mode Suppression Ratio	SMSR	dB	30	-	--	
Eye Diagram	-	-	ITU-TG.957 STM-16			
Dispersion Penalty	-	dB	-	-	2	

## Pin Description

Pin	Name	Description	Pin	Name	Description
1	NC		13	Vcc	Positive power supply(+5V)
2	P-MON	LD output power indication	14	NC	
3	B-MON	LD bias current monitor	15	GND	Ground
4	LD enable	COMS Active Low	16	Data(+)	Positive Data Output
5	ClockSelect	COMS Active Low	17	GND	Ground
6	GND	Ground	18	Data(-)	Negative Data Output
7	NC		19	GND	Ground
8	Fault Alarm	COMS Active Low	20	Clock(+)	Positive Clock Output
9	NC		21	GND	Ground
10	NC		22	Clock(-)	Negative Clock Output
11	NC		23	GND	Ground
12	NC		24	Vcc	Positive power supply(+5V)

## Interface:

Data input and clock signal

Internally AC coupled, 50 $\Omega$  input impedance. The peak-peak Voltage of single-ended input is no less than 250mV. When using single-ended input, 50 $\Omega$  resistance of the reverse end can be grounded.

Clock selection: Active Low

When CMOS low, clock function is enable.

LD enable: Active Low

When CMOS low, LD operates..

Fault alarm: Active Low

When CMOS low, status FAULT announced

LD output power indication (BFM)

$VBFM (V) = W(mW)$

VBFM: Voltage output of Pin2;

W: LD optical power output


Bias indication (BIM)

$VBIM (V) = 100 * IBIAS (mA)$


VBIM: Voltage output of Pin3;

IBIAS: Bias current

## Block diagram

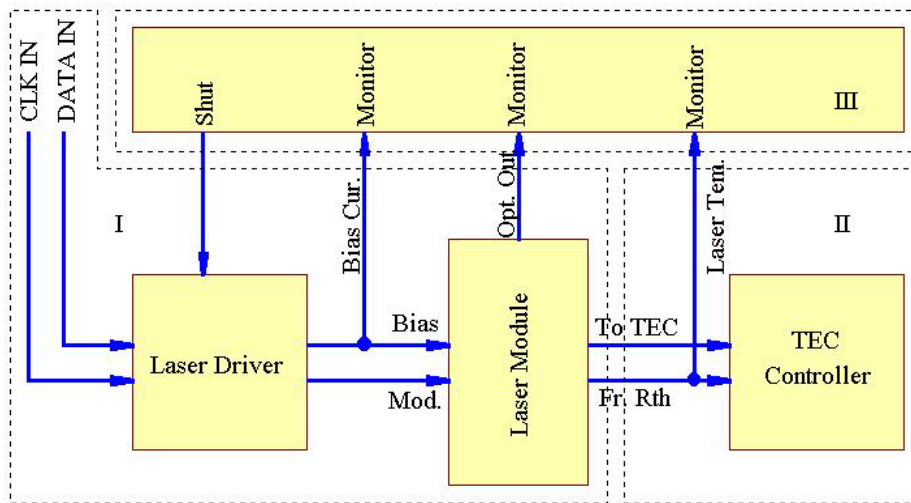

## Package outline (unit:mm)

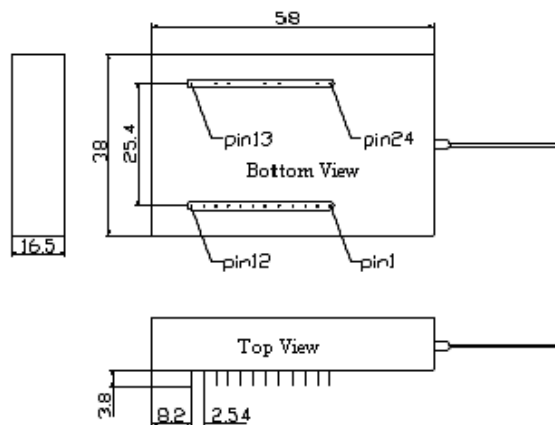

## Ordering information

Part No	Specification					Application
	Package	Datarate	Laser	Optical Power	distance	
TX5S335	DIP24Pin	2.5G	1550nm DFB	-2 ~ +3dBm	80km	SDH

WTD reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Edition 2009-12-1

Published by Wuhan Telecommunication Devices Co.,Ltd.

Copyright © WTD

All Rights Reserved.